



4 MP Network IR Water-proof Dome Camera



Features

- 1/3" CMOS
- 0.05 lux @F1.2, AGC ON; 0 lux with IR
- 3.3 ~ 12 mm @F1.4, angle of view : 80°~38°
- 120dB WDR
- 2D / 3D DNR
- 0°~360° Pan, 0°~90° Tilt, 0°~360° Rotation
- H.265 / H.264 / MJPEG
- Main Profile @Level 4.1 High Tier
- 4MP (2592×1520), 2K (2560×1440), 3MP (2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
- 60Hz: 4MP (1 ~ 30fps) / 2K (1 ~ 30fps) / 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps)
- 50Hz: 4MP (1 ~ 25fps) / 2K (1 ~ 25fps) / 3MP (1 ~ 25fps) / 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
- 64 Kbps ~ 10 Mbps
- VBR / CBR
- Five levels under VBR; Freely adjustable under CBR
- ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
- G711A / U
- Each ROI to be configured separately
- RJ45
- MIC IN × 1
- CVBS video output (BNC × 1)
- IE browsing, CMS remote control
- Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
- TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
- ONVIF, GB-T/28181-2011
- Network remote storage
- Motion alarm
- Yes
- 30 m
- IP66
- DC 12V / PoE
- < 2.5W
- < 5.5W
- -20 °C ~ 50 °C, 10 % ~ 90 % humidity
- Φ109 × 130
- 689g
- Pendant mounting (Wall mounting available with the junction box and bracket)

Dimensions

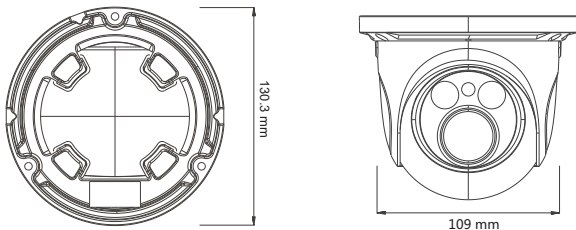

Specifications

Specifications	Model	CAM-IP6194 -Z
Camera		
Image Sensor		1 / 3 "CMOS
Image Size		2688 × 1520
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Auto Iris		Fixed Iris
Min. Illumination		0.05 lux @F1.2, AGC ON; 0 lux with IR
Lens		3.3 ~ 12 mm @F1.4, angle of view : 80°~38°
Lens Mount		Φ14
Day & Night		ICR
Wide Dynamic Range		120dB
BLC		Yes
HLC		Yes
Defogging		Yes
Digital NR		2D / 3D DNR
Angle Adjustment		Pan : 0°~360°, Tilt : 0°~90°, Rotation : 0°~360°
Image		
Video Compression		H.265 / H.264 / MJPEG
H.265 Compression Standard		Main Profile @Level 4.1 High Tier
Resolution		4MP (2592×1520), 2K (2560×1440), 3MP (2304×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream		60Hz : 4MP (1 ~ 30fps) / 2K (1 ~ 30fps) / 3MP (1 ~ 30fps) / 1080P (1 ~ 30fps) / 720P (1 ~ 30fps) 50Hz : 4MP (1 ~ 25fps) / 2K (1 ~ 25fps) / 3MP (1 ~ 25fps) / 1080P (1 ~ 25fps) / 720P (1 ~ 25fps)
Bit Rate		64 Kbps ~ 10 Mbps
Encode Mode		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc. adjustable through client software or web browser
Audio Compression		G711A / U
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45
Audio		MIC IN × 1
Video Output		CVBS video output (BNC × 1)
Functions		
Remote Monitoring		IE browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 10 users; Support multi-stream real time transmission
Network Protocol		TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
Interface Protocol		ONVIF, GB-T/28181-2011
Storage		Network remote storage
Smart Alarm		Motion alarm
PoE		Yes
IR Distance		30 m
Water-proof		IP66
Others		
Power Supply		DC 12V / PoE
Power Consumption		< 2.5W
IR Consumption ON		< 5.5W
Operating Environment		-20 °C ~ 50 °C, 10 % ~ 90 % humidity
Dimensions (mm)		Φ109 × 130
Weight (net)		689g
Installation		Pendant mounting (Wall mounting available with the junction box and bracket)

