

5 MP Network IR Water-resistant Fixed Dome Camera




EYEONET®



Features

- 5MP (2592 × 1944) H.265 coding
- Max. resolution: 2592 × 1944
- ICR auto switch, true day / night
- 20m IR night view distance
- 3D DNR, digital WDR, ROI coding
- Smart analytics (optional) : video exception, line crossing detection and intrusion detection
- PoE power supply
- Support smart phone, iPad, remote monitoring
- P2P function optional
- IP66 & IK10 protection grade
- Support three streams

Dimensions

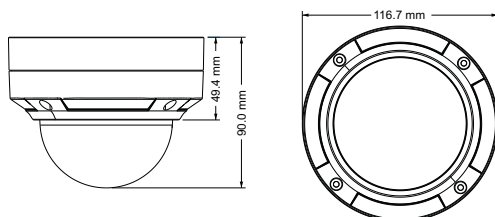

Specifications

Specifications	Model	CAM-IP639E5W-28
Camera		
Image Sensor		1 / 2.7 "CMOS
Image Size		2592 × 1944
Electronic Shutter		1 / 25 s ~ 1 / 100000 s
Iris Type		Fixed iris
Min. Illumination		0.013 lux @F1.2,AGC ON; 0 lux with IR
Lens		2.8 mm
Lens Mount		M12
Day & Night		ICR
Wide Dynamic Range		Digital WDR
Digital NR		2D / 3D DNR
Angle Adjustment		Pan : 0°~355°, Tilt : 0°~67°, Rotation : 0°~355°
Image		
Video Compression		H.265 / H.264 / MJPEG
H.265 Compression Standard		Main Profile @Leve4.1 High Tier
Resolution		5MP(2592×1944), 4MP (2592×1520), 2K (2560×1440), 3MP(2304 ×1296), 1080P (1920×1080), 720P (1280×720), D1, CIF, 480×240
Main Stream		60Hz : 5MP(1 ~ 20fps) / 4MP (1~30fps) / 2K(1 ~ 30fps) / 3MP(1 ~ 30fps) / 1080P(1 ~ 30fps) / 720P(1 ~ 30fps) 50Hz : 5MP(1 ~ 20fps) / 4MP (1~30fps) / 2K(1 ~ 25fps) / 3MP(1 ~25fps) / 1080P(1 ~ 25fps) / 720P(1 ~ 25fps)
Bit Rate		128 Kbps ~ 10 Mbps
Bit Rate Type		VBR / CBR
Quality		Five levels under VBR; Freely adjustable under CBR
Image Settings		ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, Antiflicker, etc. adjustable through client software or web browser
ROI		Each ROI to be configured separately
Interfaces		
Network		RJ45
Functions		
Remote Monitoring		Web browsing, CMS remote control
Online Connection		Support simultaneous monitoring for up to 6 users; Support multi-stream real time transmission
Network Protocol		IPv4, IPv6, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP, SNMP, 802.1x, QoS
Interface Protocol		ONVIF
Storage		Network remote storage
Smart Alarm		Motion alarm
PoE		Yes
IR Distance		20m
Protection Grade		IP66 & IK10
Others		
Power Supply		DC12V /PoE power supply
Power Consumption		< 6W
Operating Environment		- 30°C ~ 60°C, humidity 95% or less (non-condensing)
Dimensions (mm)		Φ 117 × 90
Weight (net)		593g
Installation		Ceiling mounting (Wall mounting available with the junction box and bracket