

EYEONET 4CH 4PoE 4K Real Time NVR

EYEONET®


4K ULTRA HD



FEATURES

- ⦿ H.265 video compression
- ⦿ Ultra 4K, 4CH@4K@30FPS real time recoding
- ⦿ Support up to 4K IPC input, P2P remote access
- ⦿ All channels simultaneous playback
- ⦿ Support IVS, push notification & email schedule
- ⦿ Support 4CH POS integration
- ⦿ Search : time slice, time, event (manual, sensor, motion), tag search
- ⦿ Express and flexible backup via USB, network
- ⦿ 4 POE ports, support POE power supply
- ⦿ Support English & French
- ⦿ Support up to 10TB HDD

PHYSICAL INTERFACES

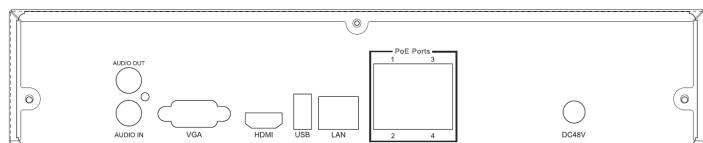

NVR-63104-4P

SPECIFICATIONS

Model		NVR-63104-4P
System	Compression	Standard H.265
	OS	Embedded Linux
Video	Network Input	4 CH IPC input
	Network Access Bandwidth	40Mbps
	Network Access Format	4K / 5MP / 4MP / 3MP / 1080P / 960P / 720P @30fps
	Output	HDMI × 1 : 4K × 2K / 1920 × 1080 / 1280 × 1024 VGA × 1 : 1920 × 1080 / 1280 × 1024
Audio	Network Input	4 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
Record	Record Stream	Dual stream recording
	Resolution	4K / 5MP / 4MP / 3MP / 1080P / 960P / 720P
	Mode	Manual, timer, motion, sensor
Playback	Simultaneous Playback	Max 4 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, sensor, motion, exception
	Input	Support IPC alarm input
	Output	Support IPC alarm output
	Triggering	Record, snap, preset, e-mail, etc.
Network	Interface	RJ45 10 / 100 Mbps × 1
	PoE Port	RJ45 × 4
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
	Web Client	Max 10 users online
Mobile Device	OS	iOS, Andriod
Storage	HDD	SATA × 1, max 10T per HDD
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	USB	USB 2.0 × 2 (one in the front panel and the other in the rear panel)
	Remote Controller	Optional
Others	Power Supply	DC48V
	Consumption	≤ 5W (without HDD)
	Dimensions (mm)	300 × 270 × 55 (W × D × H)
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity