

# EYEONET 64CH 4K Real Time NVR

## EYEONET®




### 4K ULTRA HD

#### FEATURES

- ⦿ H.265 video compression
- ⦿ Ultra 4K, 64CH@4K@30FPS real time recoding
- ⦿ Support up to 4K IPC input, P2P remote access
- ⦿ 16 channels simultaneous playback
- ⦿ Support IVS, push notification & email schedule
- ⦿ Support 4CH POS integration
- ⦿ Search : time slice, time, event ( manual, sensor, motion ), tag search
- ⦿ Express and flexible backup via USB, network
- ⦿ 8 SATA, 2 e-SATA, support up to 10TB HDD
- ⦿ Support English & French

#### PHYSICAL INTERFACES

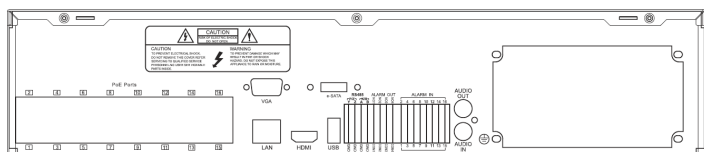

## NVR-63864

#### SPECIFICATIONS

Model		NVR-63864
System	Compression	Standard H.265
	OS	Embedded Linux
Video	Network Input	64 CH IPC input
	Network Access Bandwidth	320Mbps
	Network Access Format	4K / 5MP / 4MP / 3MP / 1080P / 960P / 720P@25 / 30fps
	Output	HDMI × 2 : one of 4K × 2K / 1920 × 1080 / 1280 × 1024 the other of 1920 × 1080 / 1280 × 1024 VGA × 1 : 1920 × 1080 / 1280 × 1024
Audio	Network Input	64 CH IPC audio input
	2-way Audio	RCA × 1
	Local Output	RCA × 1
Record	Record Stream	Dual stream recording
	Resolution	4K / 5MP / 4MP / 3MP / 1080P / 960P / 720P
	Mode	Manual, timer, motion, sensor
Playback	Simultaneous Playback	Max 16 CH
	Search	Time slice / time / event / tag search
	Smart Search	Highlighted color to display the camera record in a certain period of time, different colors refers to different record events
	Function	Play, pause, FF, FB, digital zoom, etc.
Alarm	Mode	Manual, sensor, motion, exception
	Input	8 CH local alarm input, support IPC alarm input
	Output	4 CH
	Triggering	Record, snap, preset, e-mail, etc.
Network	Interface	RJ45 10 / 100 / 1000 Mbps × 2
	Protocol	TCP / IP, PPPoE, DHCP, DNS, DDNS, UPnP, NTP, SMTP
	Web Client	Max 10 users online
Mobile Device	OS	iOS, Andriod
Storage	HDD	SATA × 8, e-SATA × 2, max 10T per HDD
Backup	Local Backup	U disk, USB mobile HDD
	Network Backup	Yes
Port	USB	USB 2.0 × 2 ( one in the front panel and the other in the rear panel ), USB 3.0 × 1 ( rear panel )
	Remote Controller	Yes
Others	Power Supply	ATX
	Consumption	≤ 15W ( without HDD )
	Dimensions (mm)	430 × 450 × 90 ( W × D × H )
	Work Environment	-10 ~ 50 °C , 10% ~ 90% humidity